

Wi-Fi 6 Elite

GPON Router (HX30GP),
AX3000, EasyMesh

The Heimgard Wi-Fi 6 GPON ONT dual band VoIP router is ideal for multi-user households. It provides excellent performance with stable internet surfing, VoIP and online gaming. With gigabit LAN ports and Wi-Fi 6 the user can experience gigabit speeds over wireless and Ethernet.

The HX30GP is powered by HeimgardOS, the most advanced operating system for mesh and gateways, based on openWRT - Completely flexible - Completely secure

Wireless Standard

- IEEE 802.11b/g/n/ax 2.4 GHz, data rate 600 Mbps 2T2R
- IEEE 802.11a/n/ac/ax 5 GHz, data rate 2400 Mbps 2T2R

Voice

- SIP (RFC3261), ITU-T G.729/G.722/G.711a/G.711
- VAD (Voice Active Detector)
- CNG (Comfort Noise Generator)
- RTP/RTCP
- DTMF Detection & Generation
- T.30, T.38 FAX Relay
- Silence Detection & Suppression
- VoIP/Fax Auto Encoding Capability, Option V.152

Power Consumption

- 12 V DC/ 2 A

Wireless

- Wireless Protected Setup (WPS)
- Support Multi SSID
- WEP, WPA / WPA2, WPA-PSK/ WPA2-PSK / WPA3 encryption
- Security type
- MU-MIMO support
- 4 x 3 dBi fixed internal antennas
- EasyMesh

VLAN/QoS

- 1 x SC/APC GPON Port
- 4 x 10/100/1000 Mbps RJ45 LAN
- 2 x FXS RJ11

Firewall & Security

- Filtering on application and Port Basis
- Stateful Packet Inspection
- IP, Port and MAC address source and destination

Key features

- ▶ **Wireless standards:**
IEEE 802.11 b/g/n/ax, 2.4 GHz
IEEE 802.11 a/n/ac/ax, 5 GHz
- ▶ **Signal rate:**
2.4 GHz: up to 600 Mbps
5 GHz: up to 2400 Mbps,
- ▶ 1 x SC/APC GPON port
- ▶ 4 x 10/100/1000 Mbps LAN ports
- ▶ 2 x FXS ports
- ▶ 2 x 2 antennas on 2.4Ghz 802.11 ax
- ▶ 3 x 3 : 2 antennas on 5Ghz 802.11 ax
- ▶ GPON Standard ITU-T G.984
- ▶ Support downstream 2.5 Gbps and upstream to 1.25 Gbps with transmission distance to 20Km
- ▶ VoIP standards: SIP (RFC3261), ITU-T G.729/G.722/G.711a/G.711
- ▶ **Optional:** Premium fabric front

Order no.: 132215

Wi-Fi 6 Elite

GPON Router (HX30GP), AX3000, EasyMesh, VoIP

GPON Interface

- Complaint with ITU-T G.984
- SC/APC connector
- 1.244 Gbps Upstream Transmitter
- 2.488 Gbps Downstream Receiver
- Wavelengths: US 1310nm, DS 1490nm
- Class B+ optics

Management and Maintenance

- Standard Compliant OMCI interface as defined by ITU-T G.988
- Compliant to TR-069 including TR181 device model and USP/TR369
- Dual Software flash with integrity checking and Automatic Rollback
- Web/HTTP: 3 level log-in via SSH, Telnet or smart phone App
- Firmware upgrade via web/TFTP/ FTP/TR-069/TR-369/OTA

Protocols and Features Supported

- RFC 284 IP Bridging & RFC 2684 IP Routing, RFC 2516, PPPoE over ATM
- Routing RIPv1, RIPv2, Static Routing
- IP Routing TCP, UDP, ICMP, ARP
- NAT&PAT (RFC1631)
- DMZ Support
- IPv4/IPv6 Dual Stack
- NAT with application layer gateway
- DHCP client/server/relay
- DNS proxy/dynamic DNS
- IGMP v1, v2, IP Filter
- IEEE 802.1D Transparent Bridging
- VLAN stacking (Q-in-Q) and VLAN Translation
- Class of Service based on UNI, VLAN-ID, 802.1p bit
- IP ToS/DSCP to 802.1p mapping
- Pass Through/Open/Redirection and Port Mapping
- Standard (IPsec, L2TP, PPTP) Pass Through
- Compatibility with other VPN Gateway

Button

- Power on/off button
- Reset button
- WPS on/off button

FLASH/RAM

- 256Mb/512Mb

Environmental Specifications

- | | |
|--------------------------|--------------------------------|
| Temperature: | Humidity: |
| • Operating: 0°C to 50°C | • Operating humidity: 5 to 95% |

Physical Specifications

- Dimensions: 140mm x 220mm x 62mm

Certification

- CE, NOM, WiFi Alliance

CPU - Platform


- EN7529+MT7916

Power Consumption

- 12 V DC/ 2 A

Status LEDs Indicators

- | | | |
|---------|-----------------|---------------|
| • Power | • Internet | • WLAN-5G/WPS |
| • PON | • GE 1-4 | • Phone 1-2 |
| • LOS | • WLAN-2.4G/WPS | |

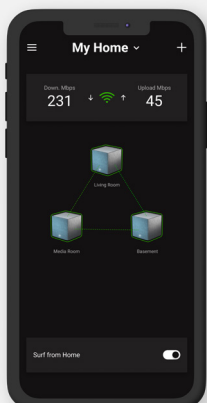

Heimgard Connect app

Set up and manage your home network with an easy-to-use app. Wi-Fi setup, client information, multiple locations support, plug-and-play pairing, parental control, Surf from Home

